


DH Illuminated Pushbutton Switch

DH

Only 21.5 mm depth behind panel.

- Depth behind panel : Only 21.5 mm
- LED Full-Face, Non-illumination available.
- Terminal : #110 Tab • Soldering
- Accessories : Barriers, Guard cover, Dust-Proof cover

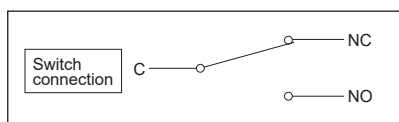

CHARACTERISTICS

Button Size	Square : □14.2 mm Round : ϕ 20.2 mm	
Contact Material	Silver contact	Silver contact (Gold-plated)
Rating (Resistive Load)	AC 125 V 3 A AC 250 V 3 A	
Insulation Resistance	More than 100 MΩ at DC 500 V	
Dielectric Strength	AC 1000 V RMS between NC and NO terminal AC 1500 V RMS between terminals and ground 50/60 Hz for 60 sec. at normal ambient temperature and humidity	
Contact Resistance	Less than 30 mΩ (Initial value) at DC 6 V 1 A	Less than 50 mΩ (Initial value) by milliohm meter
Vibration Resistance	10 to 55 Hz, Amplitude 1.5 mm	
Mechanical Life	Momentary	More than 2,000,000 operations
	Alternate	More than 200,000 operations
Electrical Life (Resistive Load)	More than 100,000 operations at max. rated load	
Operating Force	4.41N max.	
Total Travel	3mm max.	
Weight	Square : 9 g Round : 11 g	
Ambient Operating Temperature	-15°C to 50°C (No Freeze, No Condensation)	
Ambient Operating Humidity	80%RH max. (No Condensation)	
Ambient Storage Temperature	-25°C to 65°C (No Freeze, No Condensation)	
Ambient Storage Humidity	80%RH max. (No Condensation)	

https://www.sunmulon.co.jp/english/products/switch_e/dh.html



- | | | |
|---|---------------------------------|------------------------------|
| ◇Dimensions : page DH-2 | ◇Accessories : page DH-3 | ◇Ordering code : page DH-4~5 |
| ◇Internal connection arrangements : page DH-7 | ◇LED specifications : page DH-7 | ◇Terminals : page DH-8 |
| ◇Mounting design / Panel cutout : page DH-9 | | |

SPECIFICATIONS

		Square	Round
Illumination type	Full-Face	A	N/A
	Non-illumination	A	A
Contact	SPDT	A	A
	DPDT	A	A
Terminal	#110 Tab Soldering	A	A
RoHS (10 Substances)		Conform to standards	

A : Applicable N/A : Not applicable

CONTACT RATINGS

● Silver contact


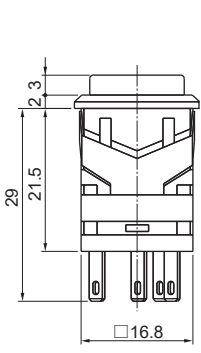
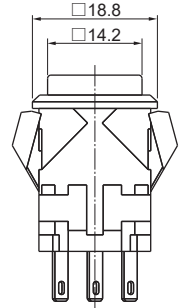

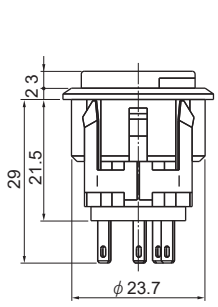

Voltage	Current (A) (Resistive load)
AC 125 V	3
250 V	3

● Silver contact (Gold-plated)

Voltage	Current (A) (Resistive load)
AC 125 V	3
250 V	3

DIMENSIONS

● With Flange

<p>Square</p>  <p>3D DXF</p>	  <p>TOP VIEW</p>
<p>Round</p>  <p>3D DXF</p>	  <p>TOP VIEW</p>








3D • DXF data download site : <https://www.sunmulon.co.jp/download/>

Tolerance : ± 0.4 mm

ILLUMINATION TYPES


LED Color symbol 70 Red 80 Green 90 Yellow ※ Yellow (90) is actually "ORANGE Yellow" not Lemon Yellow.	
Full-Face	70 80 90

ACCESSORIES

Name	Appearance	Classification	Part no.		Precautions for use
Barrier 3D DXF		Center barrier	Black	DH-324-B	- Cannot be used with guard cover and dust proof cover.
			White	DH-324-W	
		Side barrier	Black	DH-323-B	
			White	DH-323-W	
		Center barrier for Guard cover	Black	DH-443-B	- Use with guard cover as a set. - Cannot be used with dust proof cover.
			White	DH-443-W	
		Side barrier for Guard cover	Black	DH-442-B	
			White	DH-442-W	
Guard cover 3D DXF		For square button	DH-450		- Use with barriers for guard cover as a set. - The cover to be opened 180° and returned by spring force.
Dust proof cover 3D DXF		For square button	DH-361		- Cannot be used with barriers and guard cover.
Removing tool		For removal button	SJ-0001		- Be used to remove button from housing.

3D • DXF data download site : <https://www.sunmulon.co.jp/download/>

Square Button

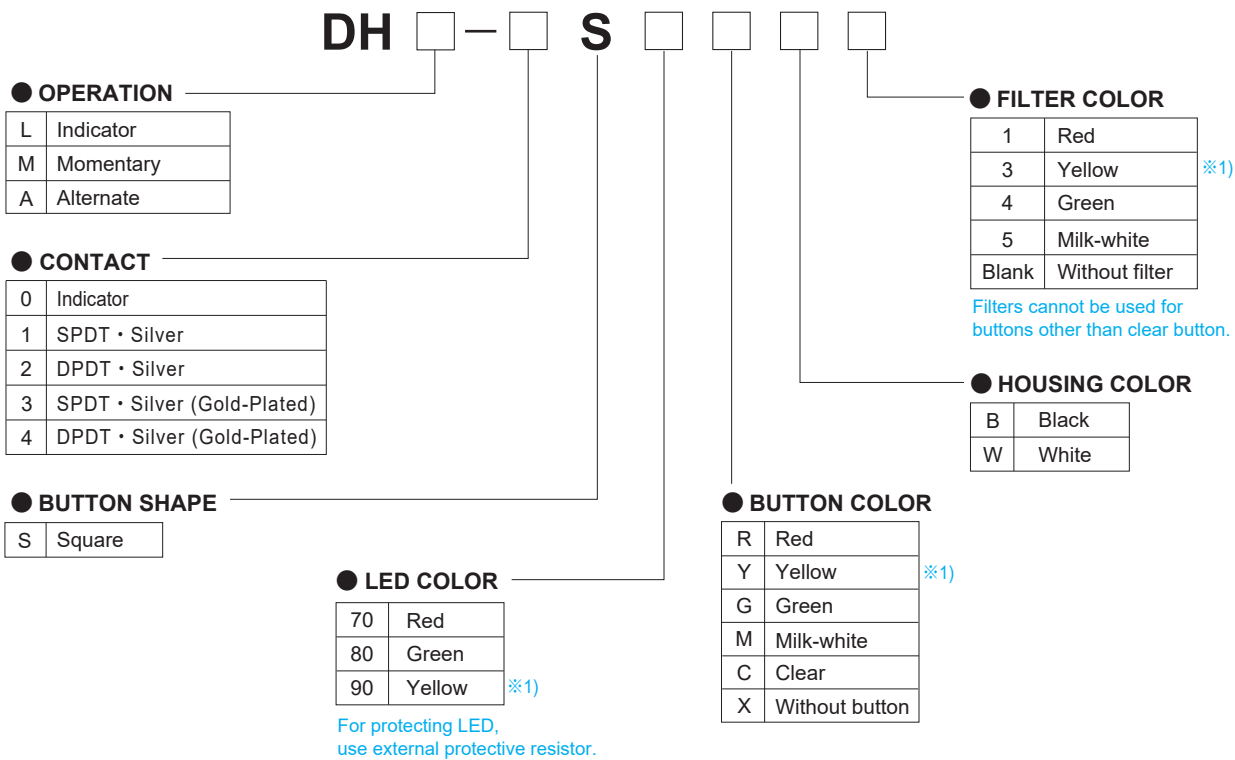

● **NOTES**

※1) The color of “Yellow” for LED (90) , button (Y) and filter (3) is actually “Orange Yellow” not Lemon Yellow.

◇Dimensions : page DH-2

◇Internal connection arrangements : page DH-7

◇Mounting design / Panel cutout : page DH-9

◇Accessories : page DH-3

◇LED specifications : page DH-7

◇Terminals : page DH-8

ORDERING CODE 【Non-illumination】

Square Button
Round Button

DH

● **OPERATION**

L	Indicator
M	Momentary
A	Alternate

● **CONTACT**

0	Indicator
1	SPDT • Silver
2	DPDT • Silver
3	SPDT • Silver (Gold-Plated)
4	DPDT • Silver (Gold-Plated)

● **BUTTON SHAPE**

S	Square
R	Round

● **ILLUMINATION TERMINAL**

Blank	Without terminal
0	With terminal

● **FILTER COLOR**

1	Red
3	Yellow ※1)
4	Green
5	Milk-white
Blank	Without filter

Filters cannot be used for buttons other than clear button.

● **HOUSING COLOR**

B	Black
W	White

● **BUTTON COLOR**

R	Red
Y	Yellow ※1)
G	Green
K	Black
M	Milk-white
C	Clear
X	Without button

Clear button cannot be specified for Round button.

● **NOTES**

※1) The color of "Yellow" for button (Y) and filter (3) is actually "Lemon Yellow" for Non-illumination.

◇Dimensions : page DH-2
 ◇Internal connection arrangements : page DH-7
 ◇Mounting design / Panel cutout : page DH-9

◇Accessories : page DH-3
 ◇LED specifications : page DH-7

◇Terminals : page DH-8

REPLACEMENT PARTS

● Full-Face BUTTON/FILTER

		Red	Green	Yellow	Milk-white	Clear
BUTTON	Square	DH-336-1R	DH-336-1LG	DH-336-1LY	DH-336-1M	DH-336-2C
FILTER	Square	DH-339-LR	DH-339-LG	DH-339-LY	DH-339-M	

※ Filters cannot be incorporated into buttons other than the Clear button, so use the Clear button when using filters.

● Non-illumination BUTTON/FILTER


		Red	Green	Yellow	Black	Milk-white	Clear
BUTTON	Square	DH-336-1R	DH-336-1G	DH-336-1Y	DH-336-1K	DH-336-1M	DH-336-2C
	Round	DH-298-R	DH-298-G	DH-298-Y	DH-298-K	DH-298-M	
FILTER	Square	DH-339-R	DH-339-G	DH-339-Y		DH-339-M	

※ Filters cannot be incorporated into buttons other than the Clear button, so use the Clear button when using filters.

※ Black button do not transmit light.

※ The yellow button and filter for Non-illumination is Lemon Yellow.

FILTER DIMENSIONS

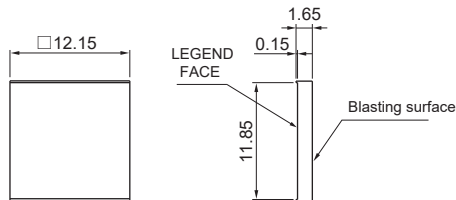


DH-339

Tolerance : ± 0.4 mm

INTERNAL CONNECTION ARRANGEMENTS


● Full-Face

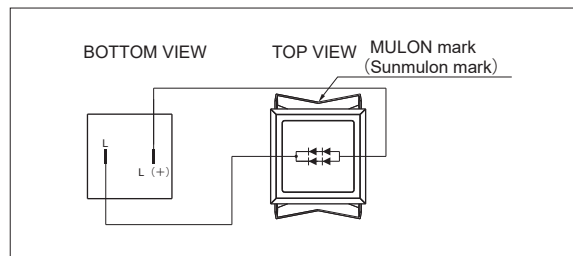

LED SPECIFICATIONS 【Full-Face】

Item	Color	Red	Green	Yellow
Max. Forward Current I_{FM}	(mA)	40	40	40
DC Reverse Voltage V_R	(V)	10	10	10
Forward Voltage V_F (Typ.) [$I_F=20mA$]	(V)	4	4.2	4
Pulse Lighting	Pulse Width PW	100		
	Duty Ratio DR	10^{-1}		
	I_{FM}	100		

● Wiring Diagram



Refer to the following formula to calculate external resistance values.

$$R = \frac{V_{DD} - V_F}{I_F}$$

V_{DD} : Supply Voltage
 V_F : Forward Voltage
 I_F : Forward Current

I_F (Forward Current) :
Refer to the Rated Current in the table on the left, and be sure to set less than I_{FM} (Max. Forward Current).

● Reference external resistor

Since LED protection resistors are not built-in, connect resistors in series referring to the table below.

Voltage	Color	Red	Green	Yellow
DC 5V	±5%	100Ω 1/8W	33Ω 1/8W	100Ω 1/8W
DC12V	±5%	620Ω 1/4W	330Ω 1/4W	620Ω 1/4W
DC24V	±5%	1500Ω 1/2W	820Ω 1/2W	1500Ω 1/2W
Reference forward current (mA)		15	25	15

For resistance value calculation

<https://www.sunmulon.co.jp/english/products/led.html>

The resistance value can be calculated just by entering the items.


TERMINALS

● TERMINALS LAYOUT (BOTTOM VIEW)


SPDT	DPDT	INDICATOR
<p>MULON mark (Sunmulon mark)</p>	<p>MULON mark (Sunmulon mark)</p>	<p>MULON mark (Sunmulon mark)</p>

※ Non-illumination type can be selected with or without terminals (L, L (+)) by ordering code.

● TERMINALS DIMENSION (BOTTOM VIEW)

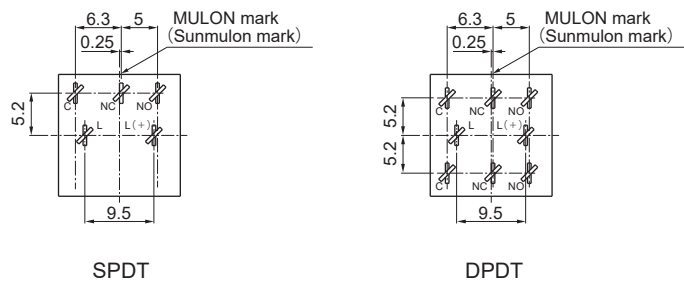

TERMINAL SHAPE






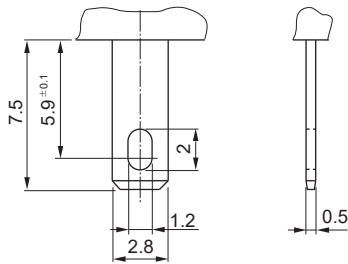


#110 Tab • Soldering Termial

Tolerance : ± 0.4 mm



MOUNTING DESIGN / PANEL CUTOUT

● Square

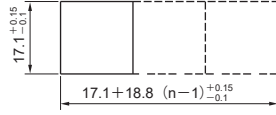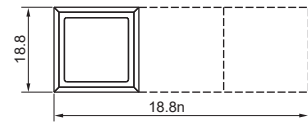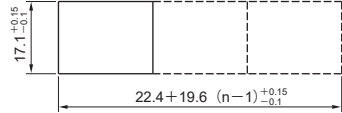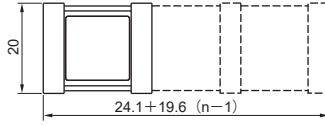	Mounting design	Panel cutout
Without Barriers	Individual 	Recommended panel thickness : 1 to 3.2 mm  $17.1 + 18.8 (n-1) \begin{smallmatrix} +0.15 \\ -0.1 \end{smallmatrix}$
	Multiple 	
With Barriers	Individual 	Recommended panel thickness : 1 to 3.2 mm  $22.4 + 19.6 (n-1) \begin{smallmatrix} +0.15 \\ -0.1 \end{smallmatrix}$ ※ Panel cut dimensions when guard covers are used are also the above dimensions.
	Multiple 	

- ※ If the panel is to be finished (e.g. coated), make sure that the panel meets the specified dimensions after the coating.
In case the panel cut dimension is too small, it may cause malfunction.
- ※ After the panel-cutting process, make sure to remove burrs on the surface.

● Round (Non-illumination type only)

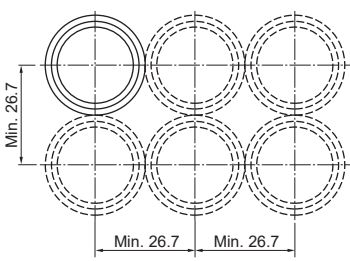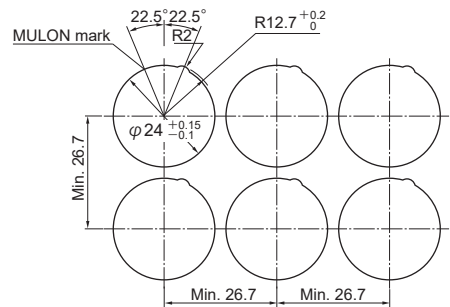Mounting design	Panel cutout
	

Tolerance : ± 0.4 mm


ACCESSORIES

BARRIER


Color	Side barrier	Center barrier
Black	DH-323-B	DH-324-B
Gray	DH-323-W	DH-324-W

※ Cannot be used with guard cover.

3D
DXF

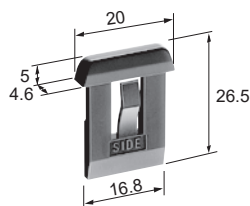

Side barrier




Center barrier

BARRIER for GUARD COVER


Color	Side barrier	Center barrier
Black	DH-442-B	DH-443-B
Gray	DH-442-W	DH-443-W

※ Use as a set with the guard cover.

3D
DXF



Side barrier



Center barrier


GUARD COVER used with BARRIERS

Part no.	DH-450
----------	--------

※ Use as a set with the barrier for guard cover.

※ The cover to be opened 180° and returned by spring force.

3D
DXF

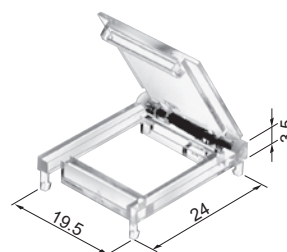


Square

Dust-Proof Cover

Part no.	DH-361
----------	--------


※ Cannot be used with barriers and guard cover.

3D
DXF

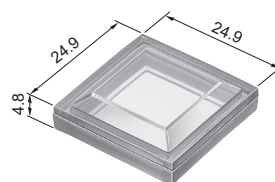

Square


Panel cutout



Recommended panel thickness : 1 to 2.5 mm

1. Removing Button


Be sure to remove with the removing tool (SJ-0001). Hang the button with the removing tool in the groove, and pull it straight out.



- ※ In case removing in any other way than the above, it may cause damage to light cartridge.
- ※ Do not reuse buttons that have been removed and deformed.


2. Installing Dust-Proof Cover

Put the switch through the cover frame (A), and mount on the panel. Afterwards press cover (B) into the groove of cover frame (A) from above and install it.

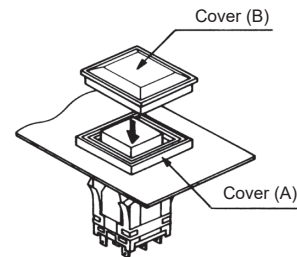


3. Installing Barriers

After setting the side barriers on the housing, and insert it into the panel cut-out.

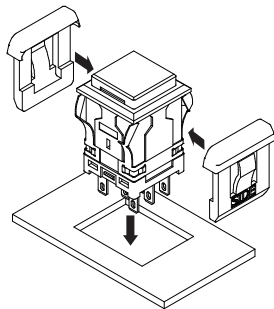

Installing Barriers (Multiple)

Insert the center barrier between the switches after mounting the switches with the side barriers into the panel cut-out.

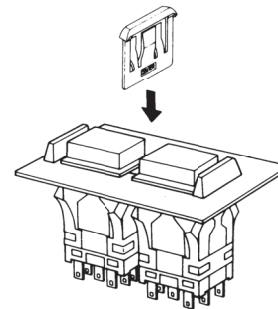

PRECAUTIONS FOR CORRECT USE

1. Solder quickly and correctly at 380°C max. and 3 seconds or less. Be careful not to touch the soldering iron to the main body.
2. Wait for one minute during and after soldering before exerting any external force on the solder.
3. Character films are not included.

If preparing the character film separately, use a heat-resistant film with a thickness of 0.1 mm. For the dimensions, please refer to the figure on the right.



※ For handling instructions and precautions other than the above, please refer to “Safety Precautions for All illuminated Pushbutton Switches”.

Tolerance : ± 0.4 mm

As of June 2022

Safety Precautions for All Illuminated Pushbutton Switches

1. Notes on contents of Catalogs

- (1) Rated values, performance values, and specification values of Sunmulon products listed in this catalog are values acquired under respective conditions in independent testing, and do not guarantee values gained in combined conditions.
- (2) The ambient operating temperature(humidity) is guaranteed by evaluation based on characteristics, and does not guarantee continuous use for a long period of time near the upper or lower limit of the ambient operating temperature(humidity) or permanent use at that temperature(humidity).
- (3) Reference data and reference values listed in catalogs are for reference purposes only, and do not guarantee that the product will always operate appropriately in that range.
- (4) The specifications / appearance and accessories of Sunmulon products listed in catalogs are subject to change or termination of sales without notice, for improvement or other reasons.
- (5) The content of catalogs is subject to change without notice.

2. Note on applications

- (1) If using Sunmulon products in combination with other products, confirm the following suitability by yourself. Sunmulon shall provide no guarantees regarding the combination suitability.
 - (a) Regulations, standards, or laws to which your machinery, equipment, etc. must conform
 - (b) Functionality and safety of your machinery and equipment
- (2) Wiring and installation that ensures the Sunmulon product used in your system, machine, device, or the like can perform and function according to its specifications.
- (3) When using Sunmulon products, be cautious when implementing the following.
 - (a) Use of Sunmulon products with sufficient allowance for rating and performance.
 - (b) Safety design, including redundant design and malfunction prevention design that prevents other danger and damage even in the event that Sunmulon product fails.
- (4) Sunmulon products are designed and manufactured as general-purpose products for general industrial products. They are not intended for use in the following applications, and in the event that you use Sunmulon product for these applications, unless otherwise agreed upon between you and Sunmulon, Sunmulon shall provide no guarantees whatsoever regarding Sunmulon products.
 - (a) Safety devices intended for human body protection
 - (b) Direct control of transport equipment (railroads / airplanes / ships / vehicles / vehicle instruments, etc.)
 - (c) Space equipment, submarine equipment
 - (d) Nuclear power control equipment, radiation related equipment
 - (e) Combustion equipment, electric heat equipment
 - (f) Disaster prevention and security equipment
 - (g) Elevating equipment
 - (h) Amusement facilities
 - (i) Facilities subject to government or industry regulations
 - (j) Use in applications that require a high degree of safety, any other equipment, instruments, or the like that could endanger life or human health

3. Warranty





- (1) The warranty period for Sunmulon products shall be 1 year after purchase or delivery to the specified location.
- (2) Warranty scope should a failure occur in Sunmulon product during the above warranty period for reasons attributable to Sunmulon, then Sunmulon shall provide that product, free of charge, the same quantity. Further, in no event shall liability of Sunmulon exceed the individual price of the product on which liability is asserted.
- (3) Failures caused by the following reasons shall be deemed outside the scope of this warranty.
 - (a) The product was handled or used deviating from conditions / environment listed in the catalogs
 - (b) The failure was caused by reasons other than Sunmulon product
 - (c) Modification or repair was performed by a party other than Sunmulon
 - (d) Replacement of maintenance parts, installation of accessories, or the like was not performed properly in accordance with the user's manual and catalogs
 - (e) The failure could not have been predicted with the scientific and technical standards at the time when the product was shipped from Sunmulon
 - (f) The failure was due to other causes not attributable to Sunmulon (including cases of force majeure such as natural disasters and other disasters)
- (4) The warranty listed in this Safety Precautions is the full and complete warranty for Sunmulon products, and Sunmulon shall bear no liability whatsoever regarding special damages, indirect damages, incidental damages, or passive damages that occurred due to Sunmulon product.

4. Handling precautions for switch


- (1) Do not perform wiring with power supplied to the switch. Do not touch the terminals or other charged parts of the switch while power is being supplied. Doing so may result in electric shock.
- (2) Be careful of electrostatic breakdown when handling.
- (3) Do not drop or otherwise apply strong force to the switch.
- (4) Do not place heavy objects on the switch.
- (5) Do not operate or use the housing (switch unit) by itself. Use the switch with assembled the illuminated part (LED module or button).
- (6) Pushbutton switches are designed to be operated by fingertips. Operating the switch using a sharp object (screwdrivers, tweezers, etc.), hard object (metal, etc.), or with a large or sudden force, may cause deform or damage the switch.
- (7) Do not use the switch under loads that exceed the rated switching capacity or other contact ratings. Doing so may result in welding of the contact, or burnout accidents.

Safety Precautions for All Illuminated Pushbutton Switches

(8) For inductive load, the arc by back EMF may cause contact failure. Insertion of arc prevention circuit as the following is recommended.

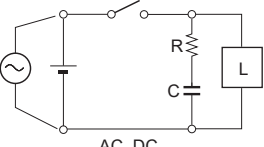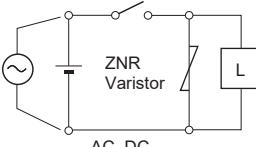
Circuit	Element selection	Circuit	Element selection
 <p style="text-align: center;">DC</p>	<p> $C : 1 \text{ to } 0.5 \mu\text{F} \times \text{switch current (A)}$ $R : 0.5 \text{ to } 1 \Omega \times \text{switch voltage (V)}$ </p> <p>The values may change according to the characteristics of the load. Determine ideal capacitance and resistance values through testing.</p>	 <p style="text-align: center;">DC</p>	<p>The diode must withstand a peak inverse voltage 4 times higher than the power supply voltage and regarding a forward current must as high or higher than the load current.</p>
 <p style="text-align: center;">AC, DC</p>		 <p style="text-align: center;">AC, DC</p>	<p>Use a varistor that can withstand the power supply voltage sufficiently. (1.5 times or more)</p>

(9) Following circuits show examples of an anti-chattering circuit.

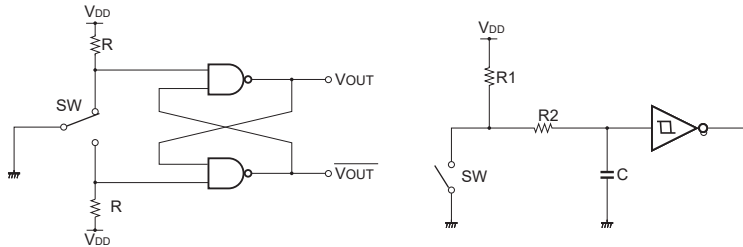

(10) Illumination


- (a) Do not apply a voltage between the LED terminal that is greater than the rated voltage. Doing so may damage the LED, cause lighting failure.
- (b) LEDs cannot be lit directly by AC circuit should be provided rectifier smoothing circuit for products other than AC input type.

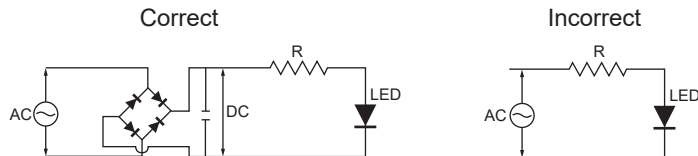

- (c) When wiring, pay attention to the polarity of the terminals.
- (d) Simultaneous lighting may not be possible with Dual-Color illumination or Split-Face illumination (2, 3, or 4 split illumination), check the catalog.
- (e) Apply voltage directly to LEDs of Non-built-in resistor type will damage the LEDs, so connect an appropriate external resistor.

(11) Wiring

- (a) Do not apply a soldering iron to the switch housing. Doing so may deform the terminals and cause defects.
- (b) See catalog for models compatible with flux prevention measures terminal. Be careful not to allow flux to penetrate sliding parts such as buttons. Use non-corrosive rosin solution as flux for dip soldering.
- (c) For soldering other than flux-preventive models, hand solder with the terminals facing down to prevent flux from penetrating into the switch.

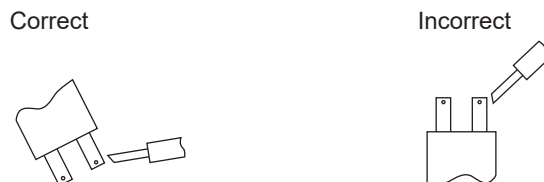

- (d) The housing of KA, K2, and K9 series are designed for reflow soldering.
- (e) Use the appropriate wire size for the applied voltage and current, and solder properly. Use of the product with incomplete soldering may cause abnormal heat generation, resulting in a fire hazard.
- (f) After wiring is completed, maintain an appropriate insulation distance.

Safety Precautions for All Illuminated Pushbutton Switches


(12) Usage environment

- (a) Do not use in the presence of flammable or explosive gases such as gasoline, thinner, LPG, etc.
- (b) Avoid using the product in places where corrosive or silicon gas is generated, high temperature, high humidity, sea breeze or direct sunlight.
- (c) Provide appropriate protection when using the product in places where it is exposed to water, oil, metal powder, or dust.
- (d) Do not use the product in a place subject to vibration or shock. It may cause malfunction or damage.
- (e) When installed in a close grouping or continuously lit, the ambient temperature may exceed the specified value due to heat generation. Take measures such as ventilation and lowering the operating voltage.
- (f) When checking the actual equipment, load conditions and operating environment should be the same as the actual operating conditions.
- (g) The ambient temperature for storage is -25°C to 65°C (No freeze, no condensation).

(13) When wiping off dirt on the exterior of the switch and accessories such as side plates, wipe lightly with a soft, dry cloth. Organic solvents such as thinner, benzene, alcohol, or other acidic chemicals may cause deformation, discoloration, or malfunction.

(14) Store the product away from malignant gases, dust, high temperature and high humidity, and keep it in our packing condition.

(15) When removing the illuminated part (or button) from the alternate switch housing, switch state should be in a free state.

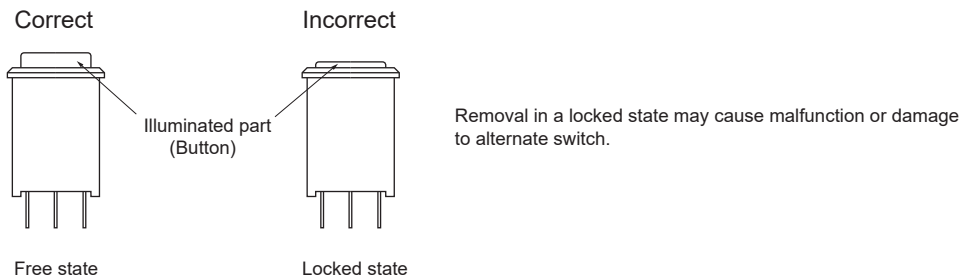

(16) Periodic inspection and replacement

- (a) Although mechanical and electrical durability are listed in the specifications column, deterioration of various parts (deterioration of resins and corrosion of metal parts) is possible due to the operating environment and method of use. We ask that you implement inspections for Sunmulon products to prevent accidents from occurring by conducting periodic inspections and replacements.
- (b) When the switch is left unused or stored for long periods, contact reliability may deteriorate due to oxidation of contacts, which may cause continuity failure, etc. Therefore, it is necessary to check the operation before use.

(17) Service scope

The price of Sunmulon products do not include the cost of services, such as dispatching technicians.